



FLEXI-E All Electric Turning Targets

Key Features:

- Full-turning face/edge/back for shoot/don't shoot training
- VAll electric – 120VAC Powered
- For use as firearms qualification & tactical training aids
- Flexible and versatile for use with any cardboard, paper, or plastic target
- Fully programmable
- Hit reactive for dynamic training or scoring
- Battery power or 120V AC
- Standard 600-meter, with an optional 2,000-meter wireless range
- Reacts to all simulated munitions and airsoft


ATS Targets pioneered threat/non-threat training target systems with the development of the Duel-A-Tron and has continued to set the bar for use-of-force decision making.

Our FLEXI-E Turning Targets feature all-weather, all-steel, fully electric all-American construction. It even has an optional integrated battery backup for uninterrupted training.

This system integrates with any of the ATS Targets' controller options, varying from a simple handheld to an Android® or Windows® tablet to a range control computer system. In addition, you may utilize each of these systems with the easy-to-use, UTC Software.

FLEXI-E SERIES SPECIFICATIONS

DIMENSIONS	
Base	14 ¾" x 10 ¾" x 6"
Target Arm Width	24"
Height to top of Arm	32 ¾" standard but can vary by customer
WEIGHT	
Base	21 lbs.
Base with Stand	39 lbs.
ENVIRONMENTAL	
Temperature	-40°F-140°F for target, 32°F - 140°F for hit sensor
Rain	Water resistant, do not submerge
Battery (Standard)	
Type	Sealed lead acid
Capacity	12VDC / 7.5 AH
Standby time	50 hours
Run time (estimated)	20 hours at 1 operation/min
Connector (Charging/coms)	Standard 110V Plug
Optional	Lithium LiFePO4
Power Supply (Optional)	
Type	Switching
Output Capacity	12VDC / 45A
Input	120VAC
Charger (Single)	
Type	IC
Input Voltage/Current	120VAC / 0.24 A
	240VAC / 0.12 A
Input Voltage/Current	12VDC / 800 mA
Transmitter	
Battery type	9V alkaline (short & medium)
	4 AA alkaline (long range)
Standby time	1 month
Run time	40 hours

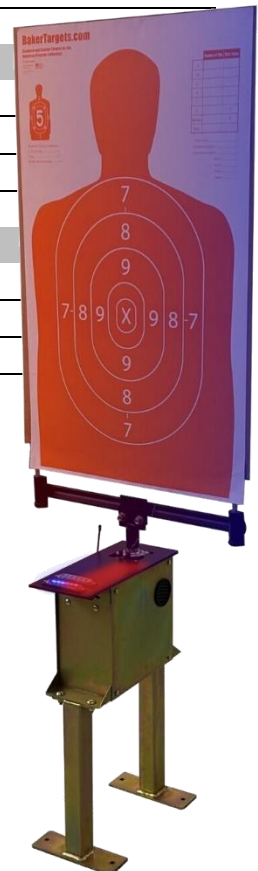

Radio	
Short-range	
Distance	600 m line of sight
Frequency Standard	900 MHz spread-spectrum FCCID MCQ-XB900HP
Frequency Option 1	2.4 GHz spread-spectrum FCCID MCQ-XBEE3
Frequency Option 2 (Japan)	2.4 GHz spread-spectrum Japan Approvals R210-119309
Transmit power	4 mW
Long Range	
Distance	2000 m line of sight
Frequency	900 MHz spread-spectrum
Transmit power	1 W
Recommended Targets	
Cardboard	Single or Double wall water resistant cardboard such as MIL-V3c or Coroplast
Plastic Silhouettes 2D	ARMY-F Ribbed or Waffle
	ARMY-E Ribbed or Waffle
Plastic Silhouettes 3D	Short Ivan
	Full Ivan
Lighting Options	
White strobe	Muzzle flash simulation or low light visibility LED, Continuous or Burst mode, activates with predetermined target move.
Red/Blue Strobe	Add realism during low low-light training scenarios. LED, Continuous or Burst mode, activates with predetermined target move.

WHAT'S IN THE BOX:

- FLEXI-E Turning Target
- Connection Dongle
- Antenna
- Hit Sensor
- Target Holder (Choice of 3)

KEY ACCESSORIES TO CONSIDER:

- PTX-Series transmitter/controller
- UTC Windows or Android Software
- Ballistic Protective Barrier
- Target Backers